

國立清華大學命題紙


99 學年度 資訊系統與應用研究所丙組(生物及醫學資訊組) 碩士班入學考試
 科目 離散數學 科目代碼 2201 共 3 頁, 第 1 頁 *請在【答案卷卡】作答

1. Answer the following short questions about trees.

- (a) (3%) Give the definition of a tree. (Please be as precise as you can.)
- (b) (3%) A binary tree has 300 leaves. How many internal nodes does this binary tree have?
- (c) (3%) Consider the problem of connecting 200 lamps to a single electric outlet by using extension cords each of which has 4 outlets. How many extension cords are needed?
- (d) (3%) A regular m -ary tree of height h has z leaves. What are the maximum and minimum values of z ?
- (e) (3%) Draw the binary tree of which the preorder traversal is $a, b, d, g, e, h, i, c, f$, and the inorder traversal is $g, d, b, h, e, i, a, c, f$.
- (f) (3%) Suppose we are given the preorder traversal and the postorder traversal of a binary tree. Can we reconstruct the tree? If so, give an algorithm for doing so. If not, give a counterexample.
- (g) (3%) Use the procedure invented by Huffman to construct an optimal tree for a given set of weights: 1, 2, 3, 4, 5, 6, 7, 8.

2. (4%) Let I denote the sum of the path lengths of all the branch nodes and E denote the sum of the path lengths of the leaves in a rooted tree. Show that for a regular m -ary tree, $E = (m-1)I + mi$, where i is the number of branch nodes.

3. (4%) Determine a minimum spanning tree for the following graph.

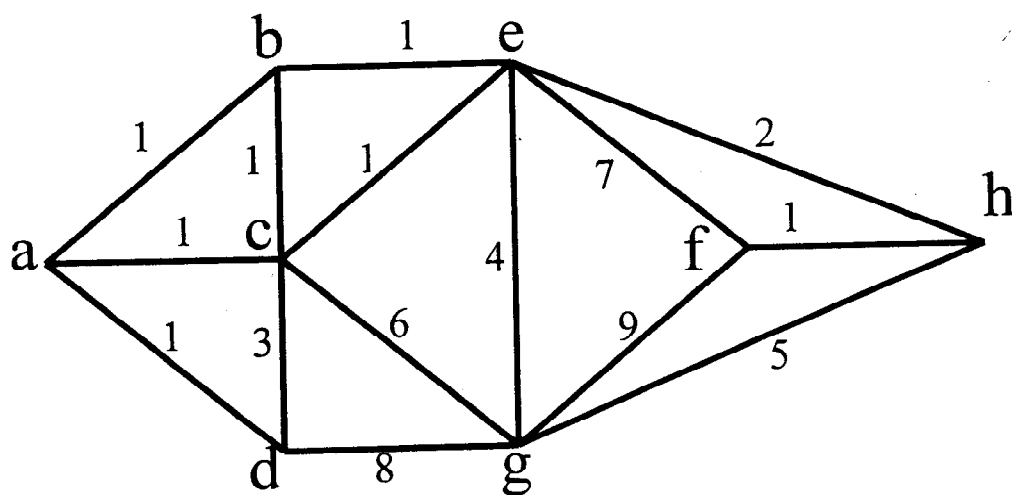


4. (4%) A three-state finite state machine has $\{0, 1\}$ as its input and output alphabets. Given the following input sequence and its corresponding output sequence, determine the machine.

Input sequence	00010101
Output sequence	011001110


國立清華大學命題紙

99 學年度 資訊系統與應用研究所丙組(生物及醫學資訊組) 碩士班入學考試
 科目 離散數學 科目代碼 2201 共 3 頁, 第 2 頁 *請在【答案卷卡】作答

5. (9%) Let f and g be functions on $\{1, 2, 3, \dots\}$. Define $f(n)=O(g(n))$, $f(n)=\Omega(g(n))$, and $f(n)=\Theta(g(n))$, respectively.
6. (9%) Show that postage of 24 cents or more can be achieved by using only 5-cent and 7-cent stamps.
7. (8%) Show that for any set X , X is not equivalent to the power set of X .
8. (a) (4%) What is the order of $n!$ in the best big Oh notation as a function of n ?
 (b) (4%) What is the order of $\lg(n!)$ in the best big Oh notation as a function of n ?
9. (11%) Find the solution to $a_n = 2a_{n-1} + 5a_{n-2} - 6a_{n-3}$ with $a_0 = 7$, $a_1 = -4$, and $a_2 = 8$.
10. (5%) Consider the relation on the set of integers $R = \{(x, y) | x - y \text{ is an integer}\}$. Show that R is an equivalence relation.
11. (4%) Find the transitive closure of the relation $\{(1, 1), (1, 3), (2, 1), (2, 3), (2, 4), (3, 2), (3, 4), (4, 1)\}$.
12. Construct an Eulerian tour or open Eulerian trail for the following graphs, respectively.
 (a) (4%)

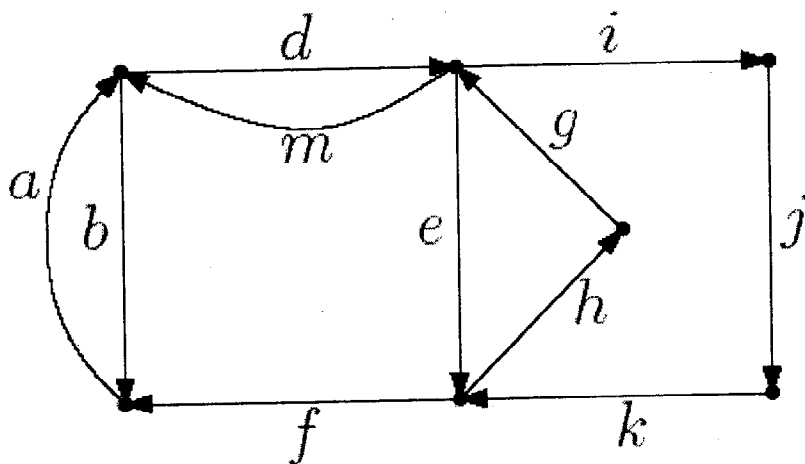

(b) (4%)

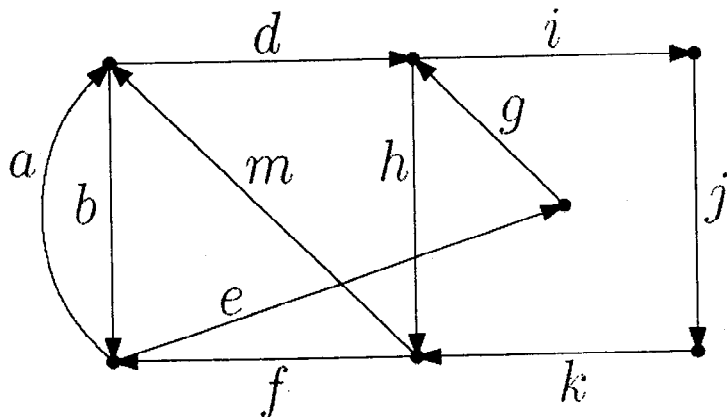

國立清華大學命題紙

99 學年度 資訊系統與應用研究所丙組(生物及醫學資訊組) 碩士班入學考試

科目 離散數學 科目代碼 2201 共 3 頁, 第 3 頁 *請在【答案卷卡】作答

13. (5%) The coloring number of an acquaintance network tells the minimum number of groups into which the persons in that network must be partitioned so that no two persons in a group have prior acquaintance. Calculate the coloring number of the following acquaintance network.

